



840 Advanced Fuel Cell Test System




Turn-key 1 kW test station
in an integrated bench-top unit

The 840 is a fully integrated test system for short stacks and large area single cell testing.

The 840 features

- Ideal for large area single cell cells & short stacks
- 890 Electronic Load: 500W (12/62/125A or 25/125/250A) or 1 kW (50/250/500A), 20 V
- 892 Data Acquisition Module: 16 channels of voltage/temperature measurement integrated with *FuelCell*[®] software
- Dual Anode & Cathode mass flow controllers for enhanced accuracy over wide flow range
- Gas Selector Valves for Automated Switching between up to 3 Anode and 3 Cathode Gases
- Automated humidifier by-pass for wet/dry cycling
- Large capacity Anode & Cathode SS humidifiers with automatic water fill
- Flexible SS temperature controlled heated gas transfer lines
- *FuelCell*[®] software for user-friendly computer controlled cell operation & experimentation
- Constant or stoichiometric-controlled reactant flow rate
- Current, voltage or power control modes
- Continuous real time cell resistance and IR-free voltage measurement by Current Interrupt
- Whole cell voltage plus two high-impedance reference inputs for half-cell data
- Safety features include detection of alarm conditions and automatic hardware shutdown for safe, reliable operation

OPTIONS

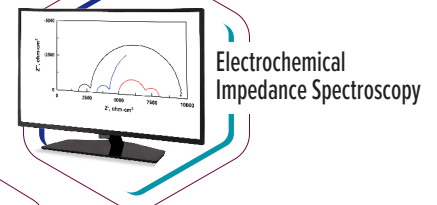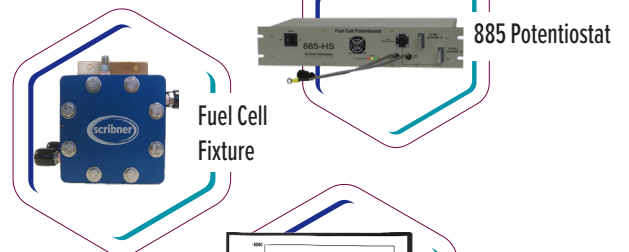

SPECIFICATIONS: 840 Advanced PEM Fuel Cell Test System

Electronic Load:

Maximum Load Current	5/25/50A; 10/50/100A; 12/62/125A; 25/125/250A (config. dependent)
Maximum Load Power	125 W, 500 W or 1 kW (configuration dependent)
Minimum Load Resistance:	< 2 m Ω (100 mV @ 50 A at load terminals)
Current Resolution:	1 mA at low currents – up to 100mA (current setting dependent)
Current Accuracy	$\pm 0.3\%$ of full scale current of selected range

Voltage Measurement and Data Acquisition:

Max . Whole Cell Voltage	20 V
Max . Reference Electrode Voltage:	9.999 V
Voltage Resolution	1 mV
Voltage Accuracy	± 3 mV $\pm 0.3\%$ of reading
Voltage & Current Data Update Rate	100 Hz
Whole Cell Sense Input Resistance	> 35 k Ω
Reference Electrode Input Resistance	> 10 ⁹ Ω

Impedance Analyzer (Optional 880):

Internal Impedance Analyzer Type	Single sine, one generator and two gain/phase measurement channels
Internal Analyzer Frequency Range	1 mHz to 10 kHz
Measurement Channels	Three: whole cell plus two half cell vs. Reference Electrode

Fuel System:

Reactant Gas Control System	All 316 SS construction of humidifiers, flow path, valves and mass flow controllers, with Swagelok® fittings and temperature controlled heated reactant transfer lines
Mass Flow Control	Dual, software controlled mass flow controllers per channel, Anode: 6 SLPM (1 + 5 SLPM), Cathode: 12 SLPM (2 + 10 SLPM). Other sizes available on request. Automatic N ₂ purge valves
Alarms	Gas supply pressures(3), Humidifier water levels(2), External (1)
Back Pressure Control	Manual or Automatic: 0 – 3 atm (0 – 30 PSIG). High Capacity forced air condensers with large tanks and SS regulators
Temperature Controllers	Five: cell, anode humidifier, anode line, cathode humidifier, cathode line
Set & Report Accuracy	$\pm 0.25\%$ of span, ± 1 least significant digit
Sensor Type	Thermocouple, Type T for cell (Type K optional for high temperature)
Humidifiers	Dual sparger-type, passivated 316L, 1650 W heaters per bottle
Temperature Range	Ambient to 99 ° C
Fill Method	Automatic water fill. Requires 3 atm (45 PSIG) minimum water feed or 1.4 atm (20 PSIG) above back pressure

Environment:

Operating Temperature	5 to 35 ° C
Power Source	120 V, 50-60 Hz, 10 A (Export model 208-240 V, 50-60 Hz, 16 A)
Enclosure Type	Single bench top enclosure
Size and Weight	18" H x 11" W x 19" D (+ 11" for heated gas lines); 50 lb .46 cm x 28 cm x 48 cm (+ 28 cm); 23 kg
Safety Features	Automatic shutdown and N ₂ purge on under-voltage, over-current, over-temperature, loss of reactant or purge gas pressure, low water, communications failure or external alarm, Emergency Stop switch for manual operator shutdown